
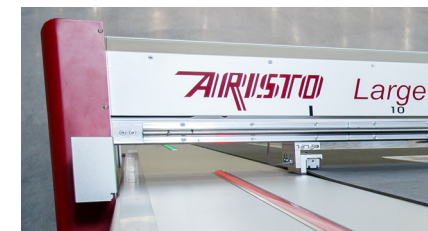
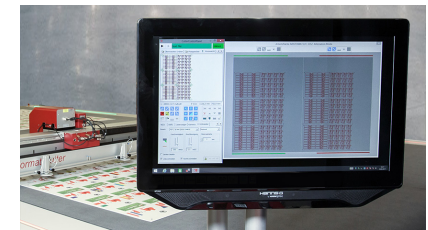
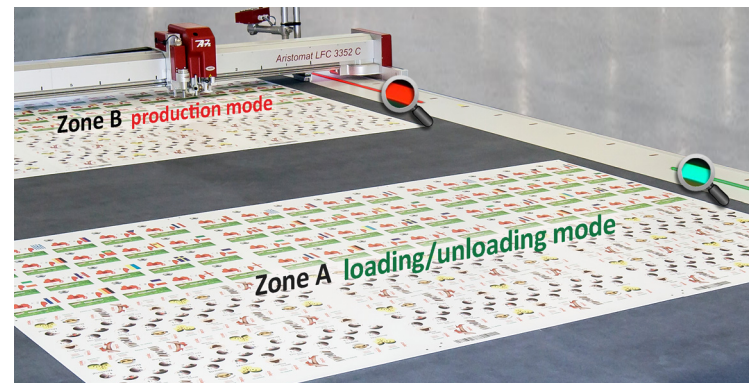


AMWA - AlternationModeWorkArea

With the optionally *AlternationModeWorkArea* the work area of the ARISTOMAT is divided into two separately operable work areas. An additional safety technology allows the loading and unloading of material in one zone and at the same time the production process in the other zone.

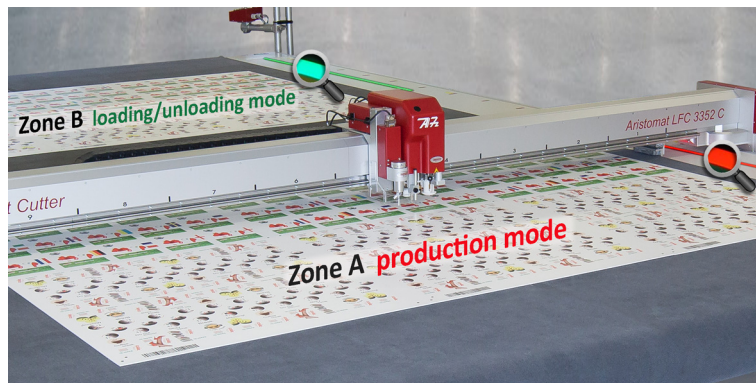

AMWA Facts

- Increases the productivity, reduces the idle time
- Advanced user concept to comply with highest safety standards
- The function *AlternationModeWorkArea* may be disabled if required, so that the entire table converts into one big working area
- For even more flexibility, also workable with conveyor configuration
- Available for ARISTOMAT series LFC

Handling Features

- ✓ Loading and unloading parallel to the production process
- ✓ Vacuum for both zones separately switchable
- ✓ Zone release and vacuum ON/OFF buttons
- ✓ Preview window with status display
- ✓ Zones status indicator by LEDs

Specification in AMWA Mode

Type	Working area in length direction (X)
ARISTOMAT LFC xx32	2*1.600 mm
ARISTOMAT LFC xx52	2*2.600 mm